






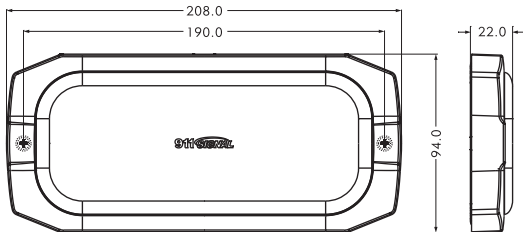

STARK

Features






- > SAE, CA T13, R65, R10, NFPA and KKK certified
- > Multi-functional with warning light, work light and STT
- > Available in single, split, dual colors
- > Provides 180 degree light spread
- > Excellent heat dissipation prolongs lifespan



Single Color

Item	Color	Voltage	Max Power	Lens	LED	Flash Patterns	Operating Temperature	Mounting
023401	   	10-33VDC	20W	TIR	12pcs 3W	96	-30 to 70°C	Surface Mount

Dual Color

Item	Color	Voltage	Max Power	Lens	LED	Flash Patterns	Operating Temperature	Mounting
023402	    	10-33VDC	20W	TIR	24pcs 3W	96	-30 to 70°C	Surface Mount

911 Signal Technology Inc.

Tel: +86 574 89017911 - 8001 Fax: +86 574 82822560

Email: sales@911signal.com

www.911signal.com

