


60mm (要折一半在产品背后)


85mm

**911 SIGNAL**®



**T4 Series**

**DIMENSIONS**

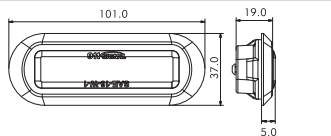

**FEATURES**

**T4 Warning Light**

- Modern and beautiful look.
- Super high intensity output in remarkably compact and low-profile design.
- Available in single or split color.
- Includes steady-burn, simultaneous and alternating flash patterns.
- Fully encapsulated for moisture, vibration and corrosion resistance.
- Low power consumption, especially for night time use.

**T4 Signal Light**


- Super compact and low-profile fluid level indicator, steady burn, available in green, blue, amber & red LEDs
- Advanced optical design featuring high intensity illumination while friendly to the eyes
- Equipped silicon pad assists in screw-free installation and mounting versatility
- Upgraded PC lenses minimize environmental damage from the sun, sand, salt and chemicals
- Low power consumption
- 10-33 VDC
- Five year warranty

**TECHNICAL SPECIFICATIONS**


Code	Item	Color	Max Power	LED	Voltage	Lens	Flash Pattern	Certificate	Mount
T4 Warning Light	021603A	Amber	7W	4Pcs 3W	DC 10-33V	TIR	19	ECE R65 ECE R10 SAE J959 CA Title 13	Flush Mount
	021603B	Blue							
	021603R	Red							
	021603W	White							
T4 Signal Light	021602A	Amber	2W	4Pcs 3W		/	R10		
	021602R	Red							
	021602B	Blue							
	021602G	Green		4Pcs 1W					

**WIRING**

**T4 Warning Light**

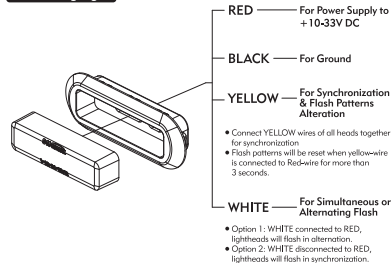


**T4 Signal Light**



⚠ The T4 signal light cannot be used as warning light, or it will be damaged

**MOUNT**

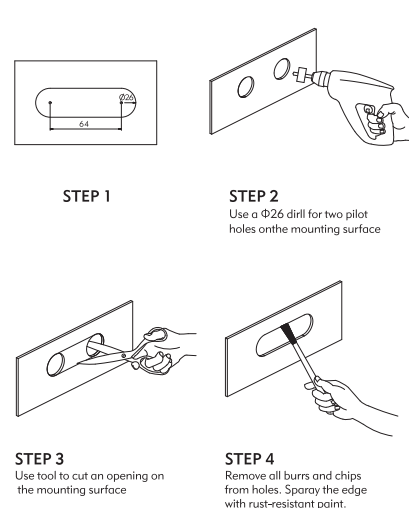

**FLASH - T4 WARNING LIGHT**

- |                          |                           |
|--------------------------|---------------------------|
| 1. Random (Default)      | 11. Single (All)          |
| 2. Single (Split)        | 12. Double (All)          |
| 3. Double (Split)        | 13. Quad (All)            |
| 4. Quad (Split)          | 14. Quint (All)           |
| 5. Quint (Split)         | 15. Ultra (All)           |
| 6. Ultra (Split)         | 16. Single-Quad (All)     |
| 7. Single-Quad (Split)   | 17. Single-H/L (All)      |
| 8. Single-H/L (Split)    | 18. Steady 2 (California) |
| 9. ECE R65 Single (All)  | 19. Steady 4 (All)        |
| 10. ECE R65 Double (All) |                           |

**911 Signal Technology Inc.**

Add: Room 701-702, Hengwei Building, No. 258, Tiangao Lane, Shounan Subdistrict, Yinzhou Area, Ningbo City, Zhejiang, China.

Tel: +86 574 89017911 +86 400 6757911  
 Fax: +86 574 82822560  
 Email: sales@911signal.com  
 Website: www.911signal.com

T4-1-X1  
V1.0